




Flexible Connectors Ton Containers or Cylinders

Flexible connectors provide an adjustable and conformable path to attach one or more upright cylinders or ton containers to a pressure manifold or wall mounted vacuum regulator.

These flexible connectors are fabricated using 3/8" copper tubing which allows good flexibility without compromising wall thickness, safety and are cadmium plated to resist corrosion in harsh environments.

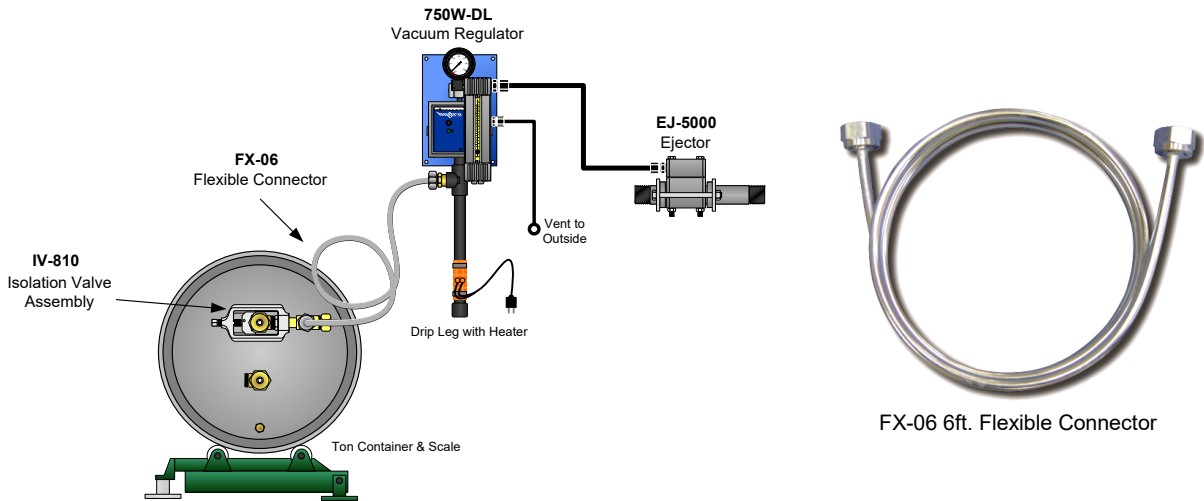

Features

- Corrosion resistant cadmium plating
- For Chlorine or Sulfur Dioxide use
- Various lengths available

Specifications

Material: Cadmium plated extruded 3/8" OD copper tubing

Connection: CGA820 silver brazed gasket connections both ends, CGA660 capture nuts both ends

Pressure: 500 PSI max. (34.5 bar)

Ordering Information

Part #	Length (ft.)	Length (m)	Dim. (d)
FX-04	4 ft.	1.2 m	0.550"
FX-06	6 ft.	1.8 m	0.550"
FX-06-J	6 ft.	1.8 m	0.490"
FX-10	10 ft.	3.0 m	0.550"
FX-10-J	10 ft.	3.0 m	0.490"
FX-16	16 ft.	4.8 m	0.550"

