
## Pneumatically Operated Ejector Nozzle Chart



Ejector: EJ-5000 350 PPD (7 Kg/h) Cl<sub>2</sub> Capacity:

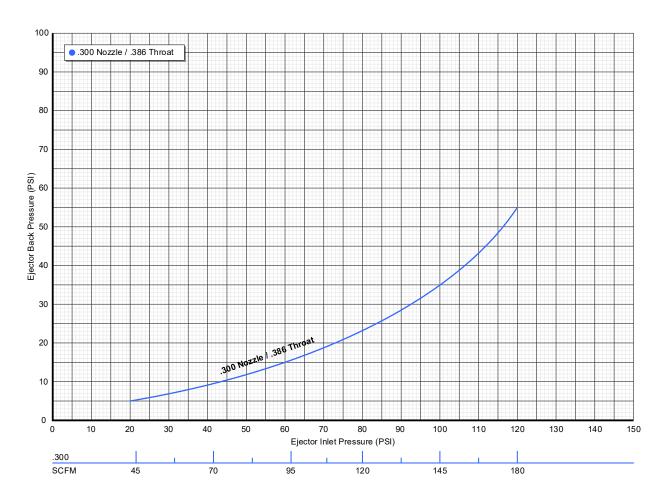

## NOTES:

- 1.
- SCFM flow through the nozzle can be Air or Nitrogen. Pressure combinations that plot below the line for any given curve is acceptable for operating that nozzle at the stated chemical feed rate for 2. the chart. Pressure combinations that plot above the line for any given curve is not acceptable.

## CAPACITY CONVERSIONS:

For gases other than chlorine (Cl<sub>2</sub>) apply the corresponding capacity conversion:

Ammonia (NH3) = 0.5 Sulfur Dioxide (SO2) = 1.0